


External Access System

Harken designed the External Access System so crews of very large yachts would have a secure system that allows freedom of movement and the ability to lock into position while working outboard along the hull. The system is made up of two joined cars that allow the attachment of the personal suspension system and the required fall-arrest system. Its CE certification is among the most respected marks in the world and unique in the marine market.

Linked cars are constructed of strong, lightweight, one-piece solid aluminum. Torlon® bearings handle high loads, reducing friction as you smoothly move the pinstop car and lock it to another position on the track. Stainless steel wire guides keep ball bearings captive when the cars are removed for maintenance.

Cars and track come in black Hardkote-anodized or clear-anodized finishes for corrosion protection, durability, and to match the aesthetics of your yacht. Stainless steel systems can be special ordered through the Harken Custom Department.

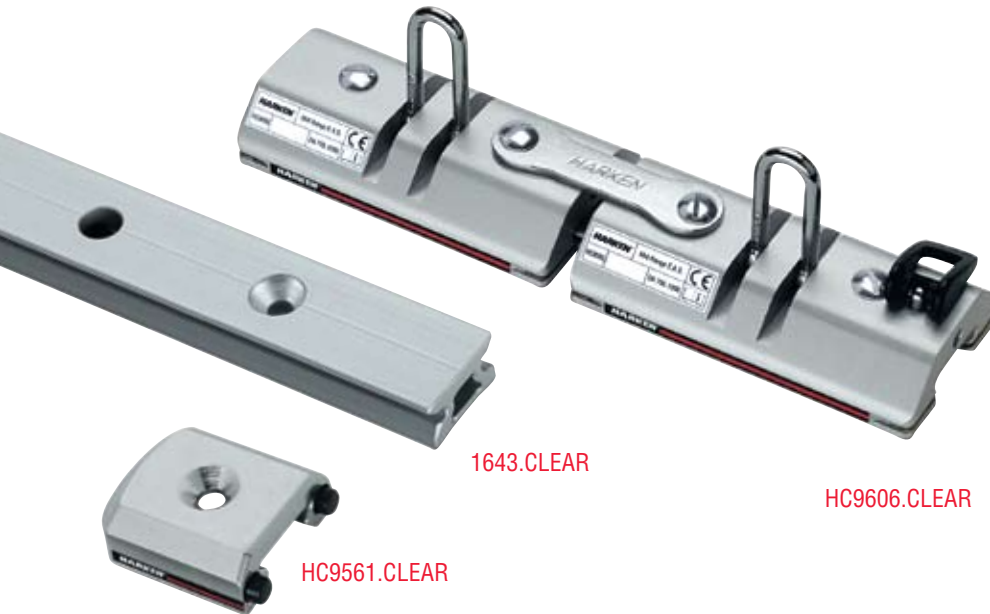


1643.CLEAR

HC9606.CLEAR

HC9561.CLEAR



Pinstop car allows movement of cars along track. Open to move; close to lock in place.

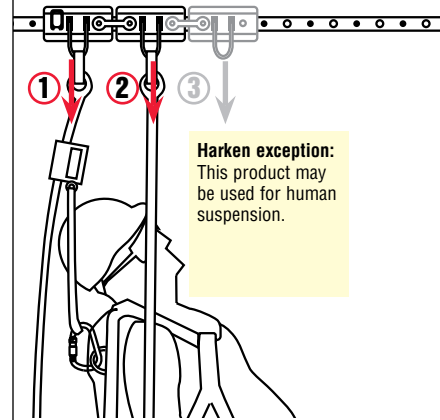

Harken exception:
This product may be used for human suspension.

The system has two anchorage points—one anchorage point for a personal suspension system and the second for the fall-arrest system. Add an optional car and coupler to work as your tool service carrier.



Stainless steel wire guides keep the ball bearings captive when cars are off the track for easy maintenance.

Car Assembly

Part No.	Description	Length		Width		Maximum working load		Fits track
		in	mm	in	mm	lb	kg	
HC9606.CLEAR*	27 mm Midrange 2-car External Access car assembly with coupler	10 ³ / ₄	273	2 ³ / ₄	70	220	100	1643

External access cars must only be used with high-load track and endstops listed below. 5/16" (8mm) track fasteners required.

*To order black Hardkote-anodized, remove ".CLEAR" from end of part number

Track

Part No.	Description	Length		Mounting hole spacing		Fasteners		Endstop	Splice link
		ft/in	m	in	mm	in	mm		
1643.3m.CLEAR*	27 mm Midrange high-load pinstop track	9'10 ¹ / ₁₆ "	3	3 ¹⁵ / ₁₆	100	5/16 FH	8 FH	HC9561.CLEAR*	1619
1643.3.6m.CLEAR*	27 mm Midrange high-load pinstop track	11'9 ³ / ₄ "	3.6	3 ¹⁵ / ₁₆	100	5/16 FH	8 FH	HC9561.CLEAR*	1619
1643.6m.CLEAR*	27 mm Midrange high-load pinstop track	19'8 ¹ / ₄ "	6	3 ¹⁵ / ₁₆	100	5/16 FH	8 FH	HC9561.CLEAR*	1619
HC9561.CLEAR*	27 mm Midrange track endstops (sold in pairs)	2 ¹ / ₄ "	57 mm	—	—	5/16 FH	8 FH	—	—
1619	Splice link	Purchase one splice link for each track section.							

*To order black Hardkote-anodized, remove ".CLEAR" from end of part number