

# Folding Padeyes



3206



3207

Harken stainless steel Folding Padeyes have a variety of applications serving as temporary or permanent attachment points for blocks, lashings, and tie downs. These hinged fittings are ready when you need to attach a snatch block or fender, but fold flat onto the deck, keeping it clear and protecting your toes when you don't. A vulcanized thermoplastic pad prevents rattling and vibration.

## USES

Use as attachment points for loops/soft attach blocks, jacklines and tethers, leads, tie downs, lifting points, fenders.

## FEATURES

Padeyes fold safely onto the deck until needed  
Loads should be perpendicular to hinge and bail  
Strongest positions are with the D-ring vertical or leaning toward fold-down position.


## MATERIALS

Investment-cast bolt-down bases and forged D-rings are 316 stainless steel  
Vulcanized thermoplastic pad prevents rattling; holds D-ring in position



Folding padeyes differ from conventional padeyes in that the load should be perpendicular to the hinge and bail instead of in line with it. The strongest positions are with the D-ring vertical or leaning toward the fold-down position, which focuses the load on the side anchored with two screws.

Part No.	Maximum working load		Breaking load		Fasteners (FH)	
	lb	kg	lb	kg	in	mm
3206	1760	800	3520	1600	1/4	6
3207	3080	1400	6160	2800	1/4	6

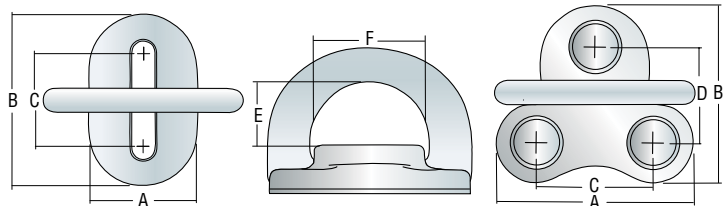

Part No.	Description	A		B		C		D		E		F		Weight	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	oz	g
3206	6 mm Low-load	1	26	1 <sup>5</sup> / <sub>8</sub>	41.5	7 <sup>7</sup> / <sub>8</sub>	23	—	—	1 <sup>19</sup> / <sub>32</sub>	14.9	1 <sup>1</sup> / <sub>8</sub>	28	2 <sup>1</sup> / <sub>4</sub>	65
3207	6 mm	1 <sup>7</sup> / <sub>8</sub>	47	1 <sup>5</sup> / <sub>8</sub>	42.25	1 <sup>1</sup> / <sub>8</sub>	28	1 <sup>15</sup> / <sub>16</sub>	23	1 <sup>19</sup> / <sub>32</sub>	14.9	1 <sup>1</sup> / <sub>8</sub>	28	2 <sup>3</sup> / <sub>4</sub>	78